


Village of Carol Stream

Local Amendments to
Illinois Plumbing Code, 2004 Edition

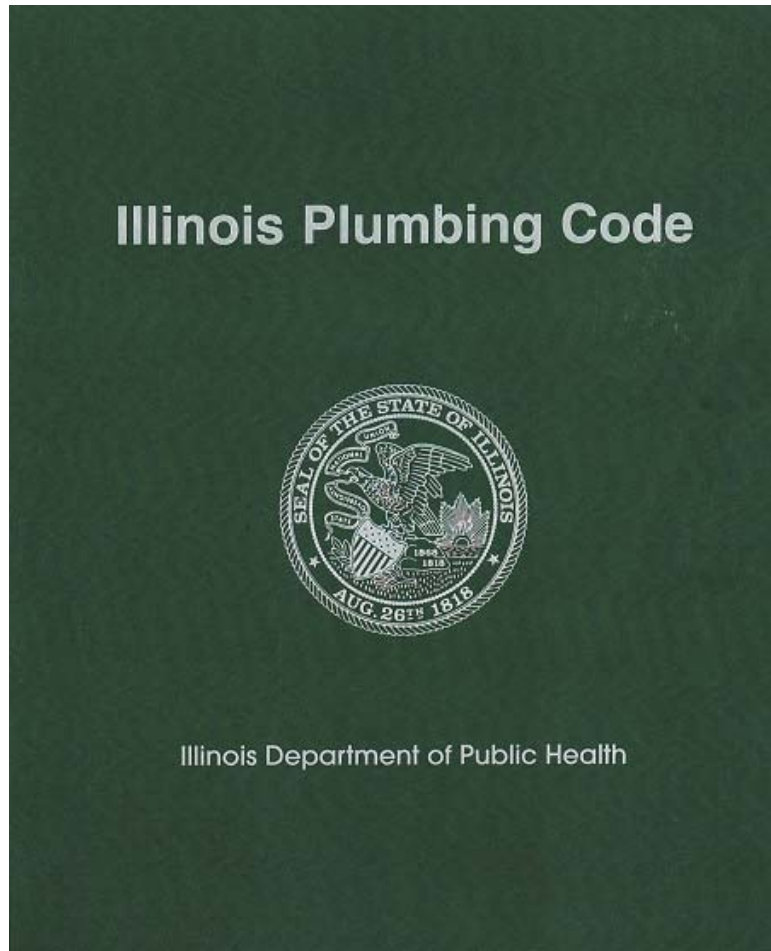

Community Development Department
(630)871-6230
communitydevelopment@carolstream.org

5/15/09

Village of Carol Stream
Community Development Department
Local Amendments to Illinois Plumbing Code, Current Edition

CONTENTS

	PAGE NO.
Amendments to Subpart A	1

AMENDMENTS TO SUBPART A

SUBPART A: DEFINITIONS AND GENERAL REGULATIONS

Section 890.110 General Regulations

The following local amendments shall be added to Section 890.110 (highlighting omitted).

- c) **Fee schedule.**
The fees for all plumbing work shall be as set forth in Chapter 6, Article 13, of the Carol Stream Village Code.
- d) **Violation penalties.**
Any person who shall violate a provision of this code or shall fail to comply with any of the requirements thereof or who shall erect, install, alter, or repair plumbing work in violation of the approved construction documents or directive of the code official, or of a permit or certificate issued under the provisions of this code, shall be guilty of a misdemeanor, punishable of a fine of not more than 750.00 dollars. Each day that a violation continues after due notice has been served shall be deemed a separate offense.
- e) **Stop work order.**
Upon notice from the code official, work on any plumbing system that is being done contrary to the provisions of this code or in a dangerous or unsafe manner shall immediately cease. Such notice shall be in writing and shall be given to the owner of the property, or to the owner's agent, or to the person doing the work. The notice shall state the conditions under which work is authorized to resume. Where an emergency exists, the code official shall not be required to give a written notice prior to stopping the work. Any person who shall continue any work in or about the structure after having been served with a stop work order, except such work as that person is directed to perform to remove a violation or unsafe condition, shall be liable to a fine of not less than 75.00 dollars or more than 750.00 dollars.
- f) **Local amendments – General.**
 - (1) **Faucets and supply fittings.** In all new construction and replacement of fixtures, faucets or lavatories located in restrooms intended for public use, faucets shall be of the self-closing type.
 - (2) **Industrial Wastewater Discharge Permit.** All applicants for a building permit to connect to the Village sanitary sewer system shall submit a completed Industrial Wastewater Discharge Permit Application.
 - (3) **Minimum size of building sewer.** The minimum size of building sewer shall be 6 inches.
 - (4) **Storm sewer depth.** Building storm sewers that connect to the public storm sewer system shall be a minimum of 42 inches below finished grade at the point of connection.

Village of Carol Stream
Local Amendments to Illinois Plumbing Code

- (5) **Water service burial depth.** Water service pipe shall be installed not less than five feet six inches below finished grade.
- (6) **Required floor drains:** A floor drain shall be located within 3 feet of any water meter, water heater or reduced pressure backflow prevention device.
- g) Local amendments – Lawn Irrigation Systems.**
 - (1) **Connection to potable water.** The connection to the potable water system shall be made by a licensed plumber, and shall be located downstream from the water meter.
 - (2) **Connection to the potable water system.** The potable water supply to lawn irrigation systems shall be protected against backflow by a reduced pressure backflow prevention device. A valve shall not be installed downstream from an atmospheric vacuum breaker. Chemicals shall not be introduced through the lawn sprinkler system.
 - (3) **Backflow prevention.** The required reduced pressure backflow prevention device shall be installed in the lawn irrigation system between the point of connection to the potable water system and the first flow or control device. Certification for the backflow prevention device shall be submitted to the code official.
 - (4) **Gate valves.** A full-flow gate valve shall be installed on each side of the backflow prevention device.
 - (5) **Floor drain.** If the backflow prevention device is located within a building, a floor drain shall be located within three feet of the device.
 - (6) **Sleeves for irrigation pipe.** Irrigation pipe installed beneath pavement shall be sleeved in galvanized steel pipe, schedule 40, or polyvinyl chloride (PVC) plastic pipe, schedule 80.